


# MATERIAL HOIST



## 10/25 – SC100G

- No Counterweight
- Smooth movement while starting
- Trans – speed function
- Start current is less than the rated current
- Low wear – out
- Call System alternative
- Safety slip – guide wire alternative
- GPRS inspect/remove system alternative

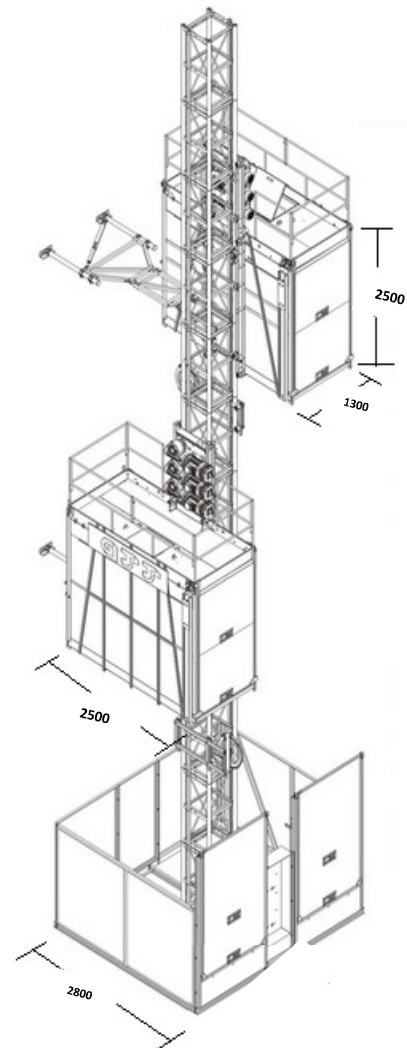

Type	10/25 – SC110	
Payload Capacity	Kg/t	1000 / 1t
Erection Load Capacity	Kg/t	2000 / 2t
Lifting Device Capacity	Kg	250
Maximum Lifting Height <i>(Height can be increased)</i>	m	550
Speed	m/min	36 mpm
Safety Device		SAJ50-2.0
Cage Platform Dimensions <i>(Length x Width x Height)</i>	m	2.5 x 1.3 x 2.5
Mast Section Type	mm	650 x 650 x 1508
Motor Power	kW	2 x 11
Motor Current Capacity	A	40
Motor Starting Current	A	40
Power Consumption	Kva	80
Power Supply Fuses	Kva	153
Enclosure Weight	Kg	980
Cage Weight	Kg / t	1500 / 1.5t
Driving Machine Weight	Kg / t	1000 / 1t
Power Requirements		100amps 3 phase